

E1012/E1022

HUMAN MACHINE INTERFACES




- Compact industrial construction
- Built-in and configurable serial ports (RS232/RS422/RS485*)
- Expansion option slot
- Real time clock
- Upgradeable terminal firmware and communication drivers
- Programmable function keys
- Programmable multicolored LEDs
- Removable text strips
- Ultra-thin display panel construction
- Bright STN display technology


E1012 / E1022 General Specifications

Model	E1012	E1022
Display Type	STN	
Display Size	160 x 32	240 x 64
Resolution/Pixels	160 x 32	240 x 64
Colors	Monochrome (Black and White)	
Input Type	Keypad	
LED / Function Keys	6 / 6	
Alarm Function	7 – 11 groups	
RAM Memory	64 MB SDRAM	
FLASH Memory	512 kB	
Serial Ports	RS232 (9-pin DSUB), combined RS422/RS485 (25-pin DSUB)	
Real-Time Clock	Battery backed	
Housing / Front Material	Cast aluminum	
Power Supply	±24 VDC (20 - 30 VDC)	
Dimensions mm (inches)	155 x 114 x 6 (6.1 x 4.4 x 0.2)	202 x 187 x 6 (7.9 x 7.3 x 0.2)
Weight kg (lbs)	0.875 (1.9)	
Max. Current Draw Min. (Max.)	0.15 (0.35)	
Ambient Temp V (H)	0 – 50°C (0 – 40°C)	

E1022 Dimensions

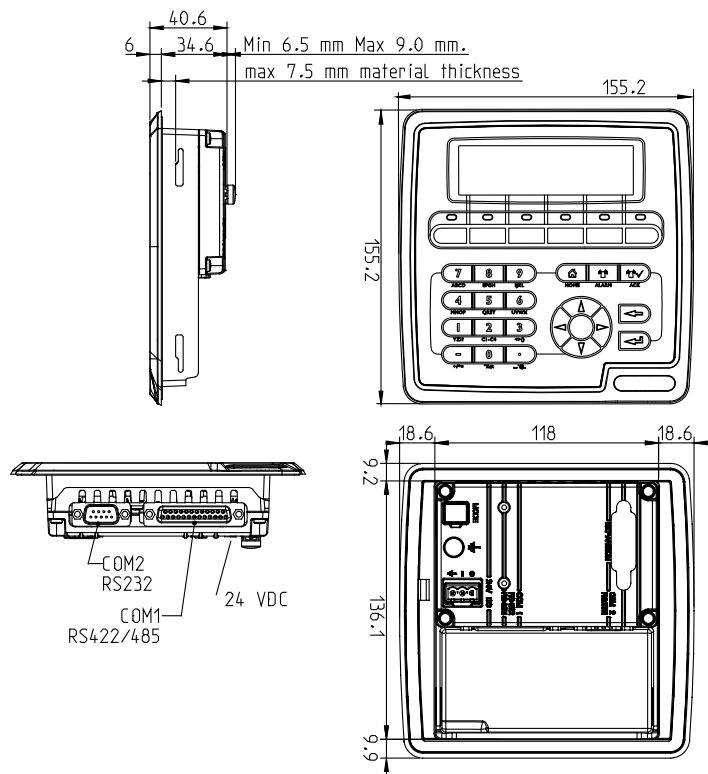

E1012 Dimensions

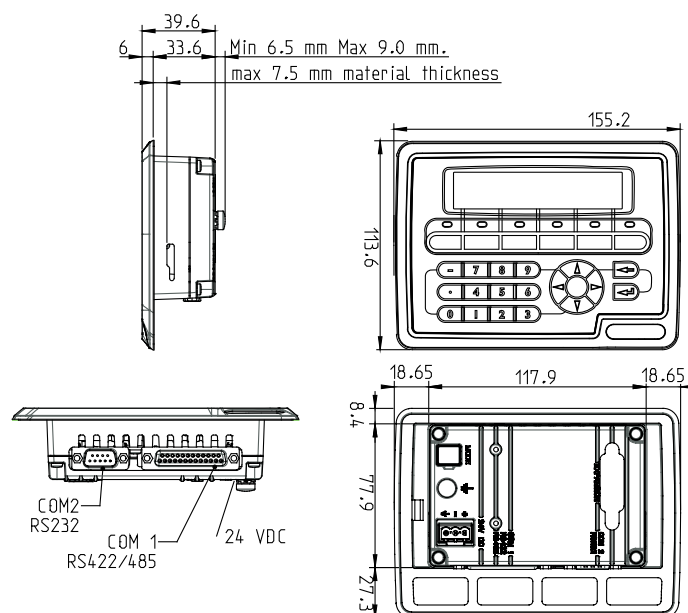

Mitsubishi Electric Automation, Inc.
500 Corporate Woods Parkway
Vernon Hills, IL 60061
Phn: (847) 478-2100
Fax: (847) 478-2253

Mitsubishi Electric Automation, Inc.
4299 14th Avenue
Markham, Ontario L3R 0J2
Phn: (905) 475-8989
Fax: (905) 475-7935

Visit us at www.meau.com

Effective April, 2008 • L-VH-06085
Specifications subject to change without notice.

Automation Platforms™ • Programmable Logic Controllers • Human Machine Interfaces • Software • Servo Systems
Motion Control • Variable Frequency Drives • Computerized Numerical Controls • PC Based Control • Robots