


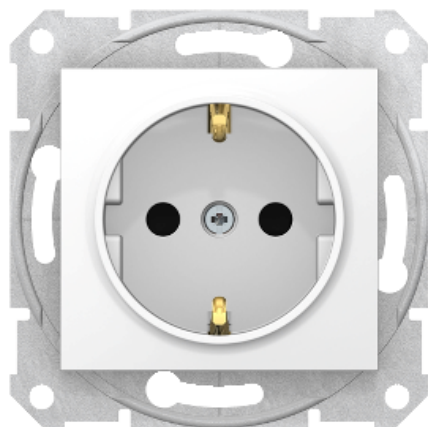

### Main

|                             |                      |
|-----------------------------|----------------------|
| Range name                  | Sedna                |
| Function                    | Socket-outlet        |
| Delivery form               | Without frame        |
| Outlet poles configuration  | 2P + E with shutters |
| Outlet standard description | Side earth           |
| Outlet standard             | Poland               |
| Rated current               | 16 A - 250 V AC      |
| Cover plate color           | White                |
| Kind of terminals           | Lift terminals       |

### Complementary

|                           |                                                           |
|---------------------------|-----------------------------------------------------------|
| Installation              | Flush                                                     |
| Power range               | 3680 W                                                    |
| Terminal capacity         | 2 x 2.5 mm <sup>2</sup>                                   |
| Wire structure            | Flexible<br>Rigid                                         |
| Wire stripping length     | 13 mm                                                     |
| Material of visible parts | ASA + PC                                                  |
| Surface finish            | Glossy                                                    |
| Fixing mode               | Claws, span of claws working range : 52...69 mm<br>Screws |
| Height                    | 71 mm                                                     |
| Width                     | 71 mm                                                     |
| Depth                     | 41.3 mm                                                   |
| Depth of visual part      | 10 mm                                                     |
| Product weight            | 0.067822 kg                                               |

## Environment

|                         |             |
|-------------------------|-------------|
| Standards               | IEC 60884-1 |
| Product certifications  | GOST-R      |
| IP degree of protection | IP20        |

## Offer Sustainability

|                                  |                                                                                                                                       |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status         | Green Premium product                                                                                                                 |
| RoHS (date code: YYWW)           | Compliant - since 1715 - Schneider Electric declaration of conformity<br><a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold<br><a href="#">Reference not containing SVHC above the threshold</a>                |
| Product environmental profile    | Available<br><a href="#">Product Environmental Profile</a>                                                                            |
| Product end of life instructions | Need no specific recycling operations                                                                                                 |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|